

Wilga als sleper gebruiken:

Mogelijke installatie

27-01-2021

Versie 1.0

Steller : Karol

Mocht de Wilga sleper niet goed in te stellen zijn is dit een mooi alternatief.

<https://www.aerofly-sim.de/download/download-aeroflyrc7/rc7-f-schlepp-auto-pilot>

Installation

1. Download the zip file to your local harddrive.
2. Decompress the zip archive into a temporary folder.
3. Locate the two files "wilga__autopilot.tmd" and "wilga__autopilot.tmc" or "beaver__autopilot.tmd" and "beaver__autopilot.tmc" and copy or cut them
4. In the aerofly RC7 User-Folder ("C:\Users\%USERNAME%\Documents\aerofly RC 7\") open the folder "aircraft_mod"
5. Create a new folder with the name "wilga" or "beaver"
6. Paste the two files into that folder
7. In the aerofly RC 7 select the Wilga or Beaver airplane. On the right hand column under the large preview image there are options to change the livery and also to change the modification of the aircraft. Go ahead and select the auto towing modification and press the load button. You should see the beaver airplane but it should do its own thing and take off and fly as long as "AUX-1" is not activated. Installation successful!

Before starting to tow

Select a windspeed less than 5m/s. Reset the rope length to the default 20m in the simulation settings if you changed it previously.

Assign "AUX-1(1-way)" for player two. It can be found in the advanced input device settings. On the very end of the list you will find a little plus sign next to "AUX", which opens more options. Select a joystick button or key press.

Usage

1. Load your desired glider as aircraft 1.
2. Load the auto towing mod as the second aircraft for player 2. Remember to change the modification of the Wilga or Beaver on the right hand column below the large preview image.
3. Press the Button "L" or "M" for aerofly RC 7.4.5 twice so that only player 1 to toggle the split-screen. Only your glider needs to be visible, really.
4. Press the Button "F" to start the towing. Follow the towing plane and release your rope when ever you want. By pressing the assigned input for "AUX-1" the autopilot will use manual input again and stopps climbing any further.

Have fun! If there are **questions** left please write them in the **comments below**.

PZL-104 Wilga with Auto-Pilot

Modification with integrated auto-pilot for single pilot glider-towing.

Usage:

1. Load your glider as aircraft 1
2. Load this plane as aircraft 2
3. Press F to start the towing
4. Press L twice to switch to fullscreen (disable the splitscreen)
- The auto-pilot can be turned off with AUX-1.

Requirements:


The Rope length has to be set to default (20m)

The wind should be less than 5m/s for a straight take-off.

Made by:

Jan-Hendrik Hanuschik (Jet-Pack)

Homepage: www.aerofly-sim.de

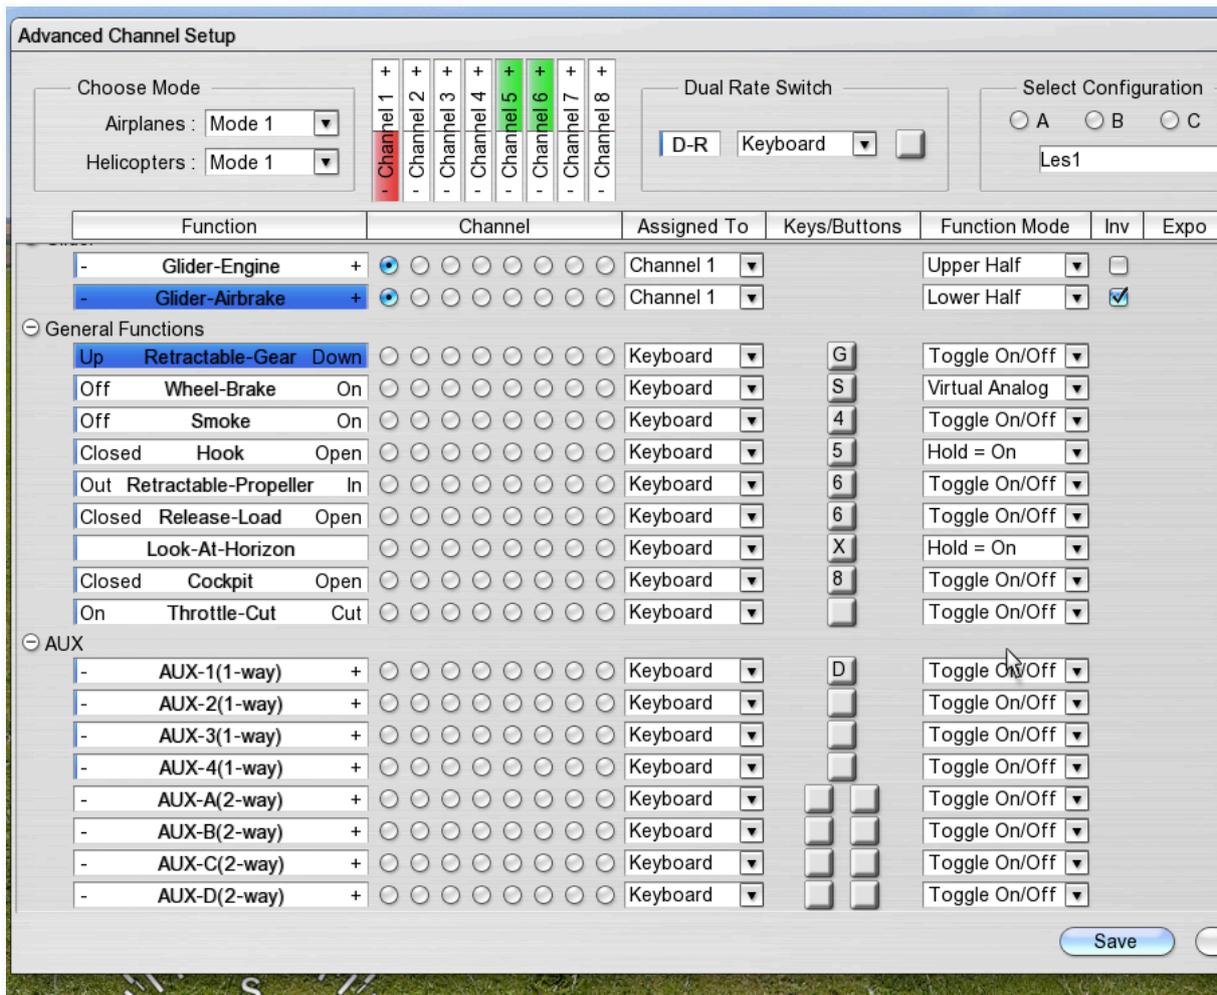

Dit is de auxinstelling : Met Button D ingesteld